

承認書

SPECIFICATION FOR APPROVAL

CUSTOMER: _____

DESCRIPTION: WIRE WOUND CHIP INDUCTOR

Cybermax PART NO: CMCW1005F1R0KST

CUSTOMERMODELNO: _____

DRAWING			CUSTOMER APPROVE
MADE	CHECKED	APPROVED	
曹春宁	张有涛	陈启善	
DATE:	2019年07月08日		



CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND CHIP INDUCTOR	PAGE NO:	PAGE 1 OF 6
PART NO:	CMCW1005F1R0KST	SN.	
CUSTOMER NO:		DATE:	2019年07月08日

变更履历

日期	版本	修订内容	制定	核准
2019-07-08	A1.0	新版发行	曹春宁	陈启善

CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND CHIP INDUCTOR	PAGE NO:	PAGE 2 OF 6
PART NO:	CMCW1005F1R0KST	SN.	
CUSTOMER NO:		DATE:	2019年07月08日

UNIT:mm

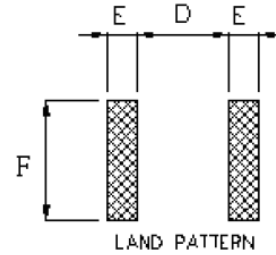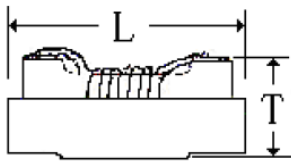

CODE	L	W	T	E	F	D	
DIMENSION	1.19MAX	0.66MAX	0.64MAX	0.40Typ.	0.64Typ.	0.64Typ.	

2. ELECTRICAL CHARACTERISTICS @25°C

ITEM	SPEC. RANGE	TEST CONDITION	TEST INSTRUMENTS
L(uH)	1.0±10%	7.9MHz/0.5V	HP4286A
DCR(Ω)	6.5 MAX		502BC
I _{rms} (mA)	50 MAX		VR116+VR7210
SRF	200 MIN		E5071C ENA

3. PART NUMBERING SYSTEM

CMCW □□□□ □□ □R□ □ □ □
 2 **3** **4** **5** **6** **7**


- 1 PRODUCT SYMBOL (产品代号)
- 2 DIMENSIONS (规格尺寸)
- 3 MATERIAL (芯片类型)
- 4 INDUCTANCE (电感量)
- 5 TOLERANCE (公差) : F±1%; G±2%; J±5%; K±10%; M±20%
- 6 TERMINAL (端电极材料): G-金端头; S-锡端头; Y-银钯端头
- 7 PACKAGING (包装方式): T-编带盘装; B-散装

APPROVED BY	CHECKED BY	DRAFT
陈启善	张有涛	曹春宁

CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND CHIP INDUCTOR	PAGE NO:	PAGE 3 OF 6
PART NO:	CMCW1005F1R0KST	SN.	
CUSTOMER NO:		DATE:	2019年07月08日

TEST	L	DCR		L	W	T	
ITEM	(uH)	(Ω)		(mm)	(mm)	(mm)	
CON.	7.9MHz	At 25°C		1.19MAX	0.66MAX	0.64MAX	
SPEC.	1.0±10%	6.50 max					
1	1.03	2.20		1.13	0.64	0.55	
2	0.99	2.22		1.15	0.63	0.53	
3	1.02	2.21		1.16	0.65	0.54	
4	0.98	2.22		1.15	0.63	0.55	
5	1.01	2.21		1.17	0.64	0.52	
6	1.03	2.20		1.14	0.65	0.54	
7	1.02	2.22		1.16	0.63	0.52	
8	1.02	2.20		1.17	0.64	0.55	
9	0.99	2.22		1.15	0.65	0.53	
10	1.01	2.21		1.16	0.64	0.54	
X	1.01	1.55		1.15	0.64	0.54	
R	0.05	0.03		0.04	0.02	0.03	


图示:

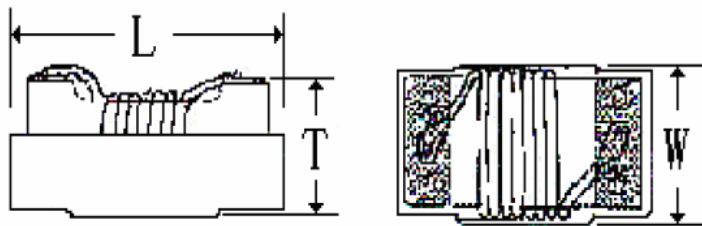

APPROVED BY	CHECKED BY	DRAFT
陈启善	张有涛	曹春宁


CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND CHIP INDUCTOR	PAGE NO:	PAGE 4 OF 6
PART NO:	CMCW1005F1R0KST	SN.	
CUSTOMER NO:		DATE:	2019年07月08日

**Figure 1.
Re-flow
Soldering (Lead
Free)**

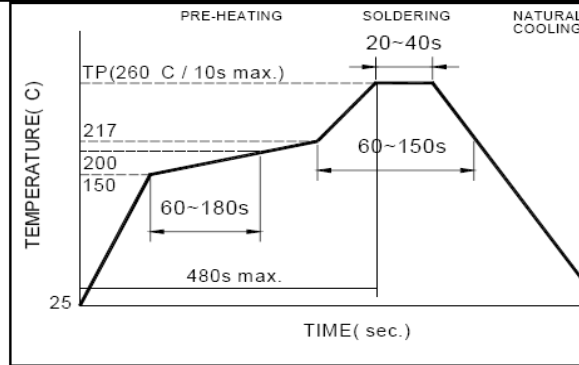


- Note:
- Preheat circuit and products to 150°C
 - 280°C tip temperature (max)

**Figure 2.
Wave Soldering**

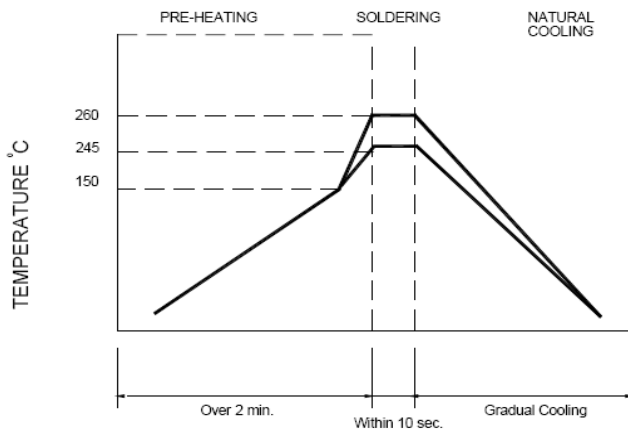

- Note :
- Never contact the ceramic with the iron tip
 - 1.0mm tip diameter (max)

**Figure 3.
Hand Soldering**

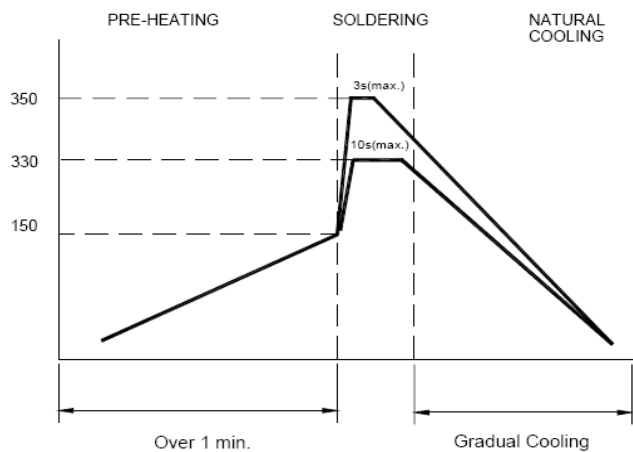



- Note:
- Use a 20 watt soldering iron with tip diameter of 1.0mm
 - Limit soldering time to 3 sec.

APPROVED BY	CHECKED BY	DRAWN BY
陈启善	张有涛	曹春宁


CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND CHIP INDUCTOR	PAGE NO:	PAGE 5 OF 6
PART NO:	CMCW1005F1R0KST	SN:	
CUSTOMER NO:		DATE:	2019年07月08日

Tape


POLYSTYRENE TAPE

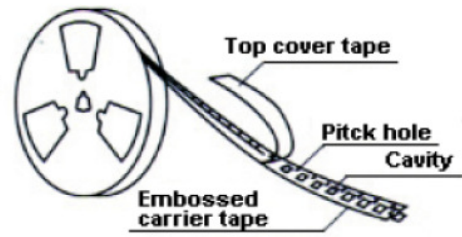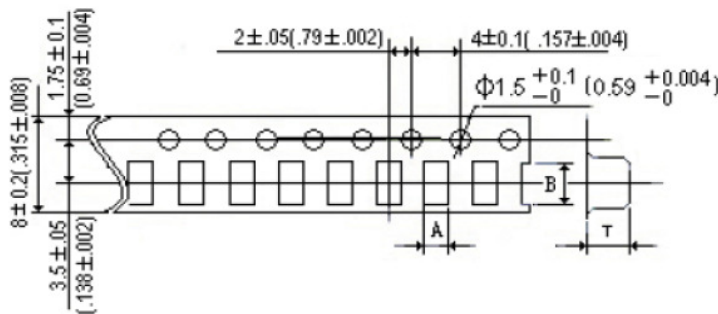

PAPER TAPE

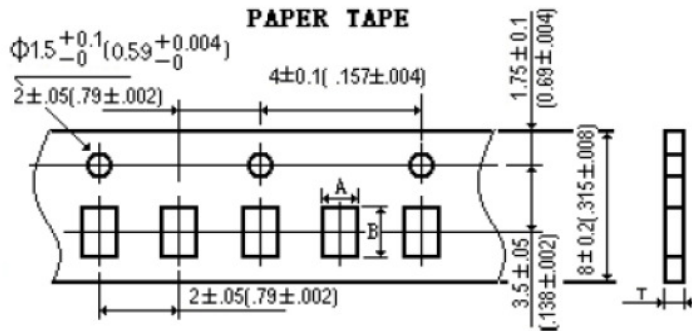

Reel Dimensions

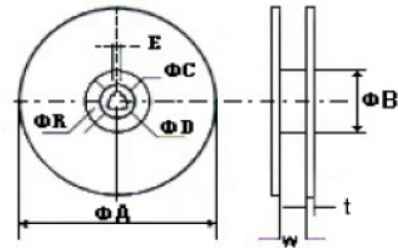

unit:(mm)

		A	B	T
纸带	0402	0.74	1.23	0.60
	0603	1.15	1.83	0.95
胶带	0805	1.85	2.40	1.45
	1008	2.73	2.90	2.34
	1210	2.96	3.60	2.40
	1812	3.22	4.82	3.15

unit	ΦA	ΦB	ΦC	ΦD	E	W	t	R
mm	178	60	13	21	2	10	2	1
	330	75	13	23	2	12	2	1


包装数量

Packaging Quantity

规格 Dimension	0402	0603	0805	1008	1210	1812
数量 Quantity(pcs)	10000	4000	3000	2000	2000	2000

APPROVED BY	CHECKED BY	DRAFT
陈启善	张有涛	曹春宁

CUSTOMER:		REV NO:	A1.0
DESCRIPTION:	WIRE WOUND CHIP INDUCTOR	PAGE NO:	PAGE 6 OF 6
PART NO:	CMCW1005F1R0KST	SN.	
CUSTOMER NO:		DATE:	2019年07月08日

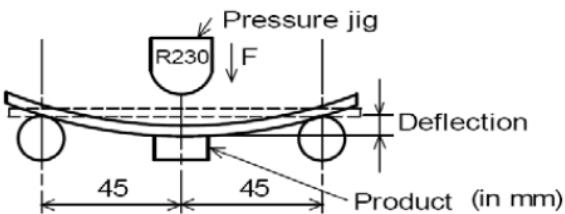High Temperature Storage	No evidence of mechanical damage Inductance change, less than $\pm 5\%$ Q change less than $\pm 10\%$	Test Temperature: $125 \pm 2^\circ\text{C}$ (Ceramic core) $85 \pm 2^\circ\text{C}$ (Ferrite core) Test Time: 96 ± 2 Hours
Low Temperature Storage	No evidence of mechanical damage Inductance change, less than $\pm 5\%$ Q change less than $\pm 10\%$	Test Temperature: $-40 \pm 2^\circ\text{C}$ Test Time: 96 ± 2 Hours
Moisture Resistance	No evidence of mechanical damage Inductance change, less than $\pm 5\%$ Q change less than $\pm 10\%$	Test Temperature: $50 \pm 2^\circ\text{C}$ Test Time: 100 Hours 相对湿度 90~95%
Vibration	No evidence of mechanical damage Inductance change, less than $\pm 5\%$ Q change less than $\pm 10\%$	Amplitude: 1.5mm X、Y、Z方向各 1Hours45min Frequency range: 10~55~10Hz(min)
Component Adhesion	No evidence of mechanical damage No evidence of peel off or broken Keep continuity of Winding	Force: 2Kgf Test Time: 5 ± 1 秒
Resistance to bend	No evidence of mechanical damage	Camber: 20mm Test Board: Glass-Epoxy board Thickness: 8mm 
Life	No evidence of mechanical damage Inductance change, less than $\pm 5\%$ Q change less than $\pm 10\%$	Test Temperature: $85 \pm 2^\circ\text{C}$ Test Time: 1000 Hours with rating current Test Time: 96 ± 2 Hours

APPROVED BY	CHECKED BY	DRAFT
陈启善	张有涛	曹春宁