

Drum Core Surface Mount Unshielded Power Inductors

◆ Features

1. Excellent solderability and high heat resistance.
2. Excellent terminal strength construction.
3. Packed in embossed carrier tape and can be used by automatic mounting machine.




◆ Applications

Power supply for VCR,OA equipment ,LCD television set notebook, DC to DC converters, DC to AC inverters etc.



◆ Shape & Dimensions

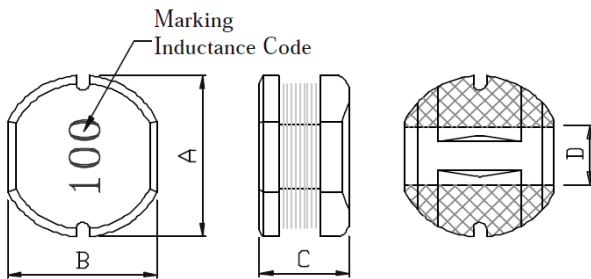

◆ Lead Free Part Numbering

CMLF 0504 - 100 M T T


(1) (2) (3) (4) (5) (6)

- (1) Series Type
- (2) Dimension: A X C
- (3) Inductance: 2R2=2.2 μ H ;
100=10 μ H; 101=100 μ H
- (4) Inductance Tolerance: K= \pm 10%, M= \pm 20%
- (5) Company Code
- (6) Packaging : packed in embossed carrier tape

Series	A (mm)	B (mm)	C (mm)	D (mm)
CMLF0504	5.8 \pm 0.3	5.2 \pm 0.3	4.5 \pm 0.3	1.5 Typ.

◆ Material

Item	Material
a. Core	Ferrite DR Core
b. Wire	Enamelled Copper wire
c. Terminal	Ag+Sn+SnPb

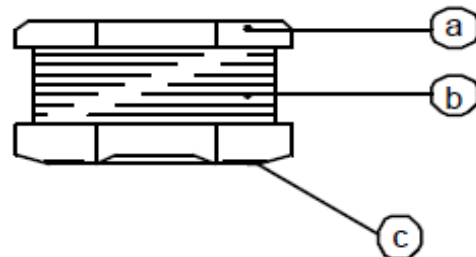

◆ Specification

Part Number 料号	Inductance(μH) 电感量	Test Freq 测试频率	DCR(Ω) Typ. 直流电阻	IDC (A) max. 额定电流
CMLF0504 Series				
CMLF0504-1R0MTT	1.00±20%	100KHz/0.25V	0.015	6.10
CMLF0504-1R2MTT	1.20±20%	100KHz/0.25V	0.020	5.70
CMLF0504-1R5MTT	1.50±20%	100KHz/0.25V	0.025	5.10
CMLF0504-1R8MTT	1.80±20%	100KHz/0.25V	0.030	4.90
CMLF0504-2R2MTT	2.20±20%	100KHz/0.25V	0.035	4.80
CMLF0504-3R3MTT	3.30±20%	100KHz/0.25V	0.045	4.20
CMLF0504-4R7MTT	4.70±20%	100KHz/0.25V	0.060	3.30
CMLF0504-5R6MTT	5.60±20%	100KHz/0.25V	0.070	3.10
CMLF0504-6R8MTT	6.80±20%	100KHz/0.25V	0.080	3.00
CMLF0504-8R2MTT	8.20±20%	100KHz/0.25V	0.090	2.70
CMLF0504-100KTT	10.0±10%	100KHz/0.25V	0.100	2.50
CMLF0504-120KTT	12.0±10%	100KHz/0.25V	0.120	2.30
CMLF0504-150KTT	15.0±10%	100KHz/0.25V	0.140	2.20
CMLF0504-180KTT	18.0±10%	100KHz/0.25V	0.150	1.83
CMLF0504-220KTT	22.0±10%	100KHz/0.25V	0.180	1.40
CMLF0504-270KTT	27.0±10%	100KHz/0.25V	0.200	1.37
CMLF0504-330KTT	33.0±10%	100KHz/0.25V	0.230	1.28
CMLF0504-390KTT	39.0±10%	100KHz/0.25V	0.320	0.80
CMLF0504-470KTT	47.0±10%	100KHz/0.25V	0.370	0.72
CMLF0504-560KTT	56.0±10%	100KHz/0.25V	0.420	0.68
CMLF0504-680KTT	68.0±10%	100KHz/0.25V	0.460	0.61
CMLF0504-820KTT	82.0±10%	100KHz/0.25V	0.600	0.58
CMLF0504-101KTT	100.0±10%	100KHz/0.25V	0.700	0.52
CMLF0504-121KTT	120.0±10%	100KHz/0.25V	0.930	0.48
CMLF0504-151KTT	150.0±10%	100KHz/0.25V	1.100	0.40
CMLF0504-181KTT	180.0±10%	100KHz/0.25V	1.380	0.38
CMLF0504-221KTT	220.0±10%	100KHz/0.25V	1.570	0.35
CMLF0504-271KTT	270.0±10%	100KHz/0.25V	1.650	0.32
CMLF0504-331KTT	330.0±10%	100KHz/0.25V	1.700	0.28
CMLF0504-391KTT	390.0±10%	100KHz/0.25V	1.800	0.26
CMLF0504-471KTT	470.0±10%	100KHz/0.25V	2.300	0.23
CMLF0504-561KTT	560.0±10%	100KHz/0.25V	2.500	0.20
CMLF0504-681KTT	680.0±10%	100KHz/0.25V	3.000	0.19
CMLF0504-821KTT	820.0±10%	100KHz/0.25V	4.500	0.16
CMLF0504-102KTT	1000.0±10%	100KHz/0.25V	4.800	0.14

◆ **Note**

- (1) Maximum allowable DC current is that which causes a 10% inductance reduction from the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C).
- (2) Operating temperature -55°C ~ +125°C.
- (3) All test data is referenced to 25°C ambient.