

High Current Chip Ferrite Bead

◆ **Features**

- 1、 Internal silver printed layers and magnetic shielded structures to minimize crosstalk
- 2、 Large withstand current (allowable current:up to 6A)
- 3、 Can be used in a wide range of frequency to suppress EMI
- 4、 Three types material and wide range of impedance values for various applications
- 5、 RoHS Compliant.



◆ **Application**

- 1、 High current DC power lines.
- 2、 Noise suppression for power line or large current signal of electric equipments such as computers and peripheral devices, DVD cameras, LCD TVs, communication equipments, OA equipments, etc.


◆ **PRODUCT IDENTIFICATION**

CMBH 3216 S 600 U S P
(1) (2) (3) (4) (5) (6) (7)

- (1) Series Type
- (2) Chip Size (mm) :Length X Width
- (3) Material Code
- (4) Nominal Impedance:600=60Ω;601=600Ω;
102=1000Ω
- (5) Rated Curren: E=300mA;F=500mA;J=800mA
L =1000mA; M=1500mA;
N=2000mA; P=2500mA;
Q=3000mA; R=4000mA;
U=5000mA W=6000mA.
- (6) Company Code
- (7) Packaging:P–Embossed paper tape, 7" reel
E- Embossed plastic tape, 7" reel

◆ **Dimensions** Unit: mm

Size(EIA)	L	W	T	E
3216(1206)	3.20±0.20	1.60±0.20	0.9±0.20	0.50±0.30

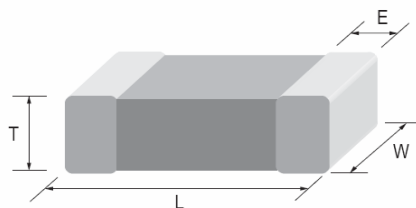


◆ Specifications

Part Number	Impedance (Ω)	Test Freq. (MHz)	DCR Max. (Ω)	Rated Current (mA)
CMBH3216 Series				
CMBH3216S100WSP	10±25%	100	0.010	6000
CMBH3216S300WSP	30±25%	100	0.012	6000
CMBH3216S600USP	60±25%	100	0.015	5000
CMBH3216S750RSP	75±25%	100	0.020	4000
CMBH3216S900QSP	90±25%	100	0.025	3000
CMBH3216S121QSP	120±25%	100	0.030	3000
CMBH3216S181QSP	180±25%	100	0.037	3000
CMBH3216S221QSP	220±25%	100	0.040	3000
CMBH3216S301QSP	300±25%	100	0.040	3000
CMBH3216S391NSP	390±25%	100	0.060	2000
CMBH3216S601NSP	600±25%	100	0.100	2000
CMBH3216S102LSP	1000±25%	100	0.300	1000

◆ General Technical Data

Operating Temperature Range	-55°C ~ +125°C
Storage Condition	Less than 40°C and 70% RH
Soldering Method	Reflow or Wave Soldering


◆ Recommended Soldering Conditions

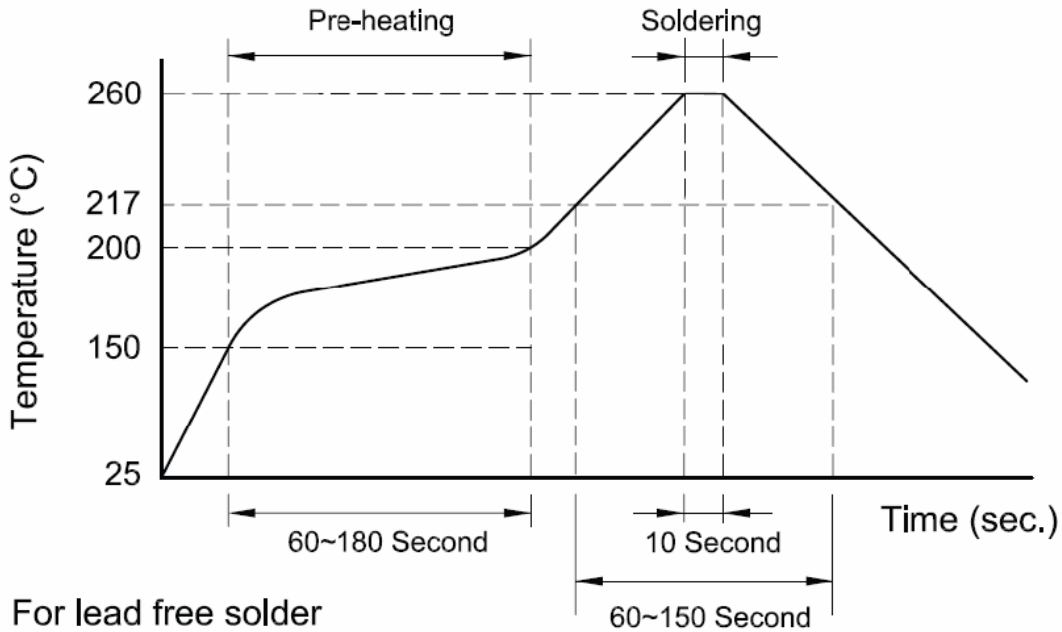


◆ Characteristics

CMBH3216 TYPE


CMBH3216S100WSP

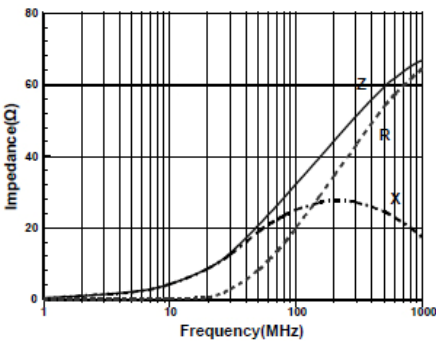


CMBH3216S300WSP

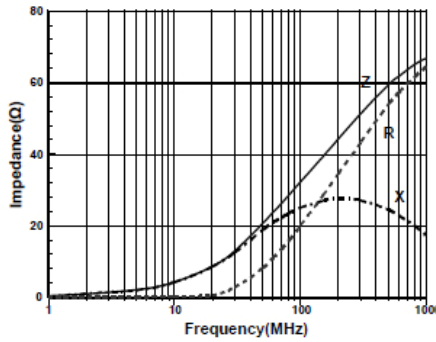


CMBH3216S600USP

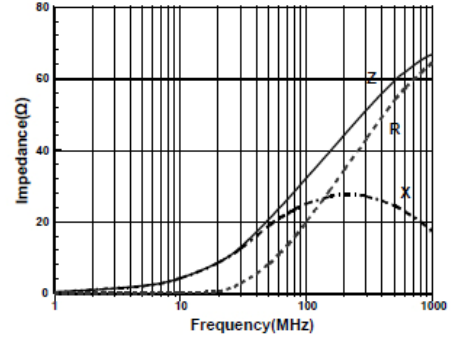


CMBH3216S750RSP

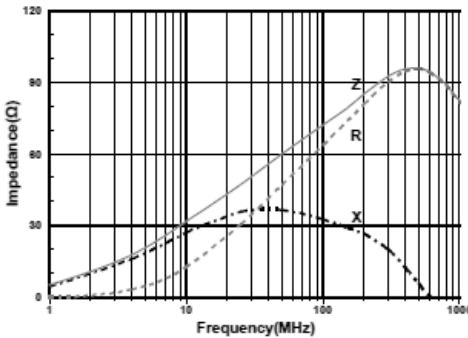

CMBH3216S900QSP

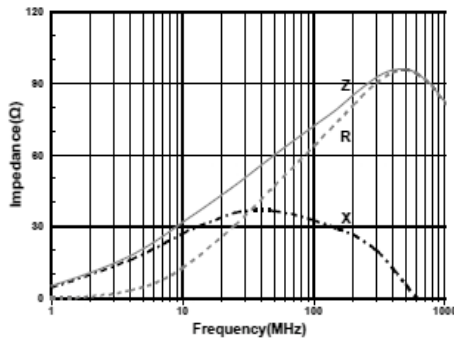


CMBH3216S121QSP

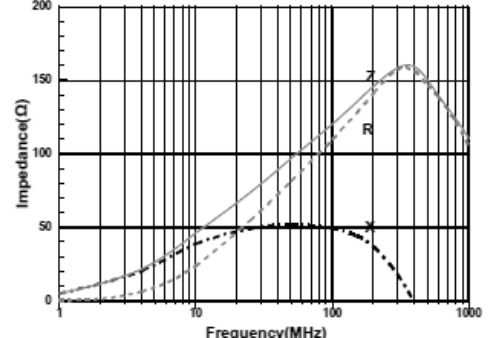


◆ **Characteristics**


CMBH3216S181QSP

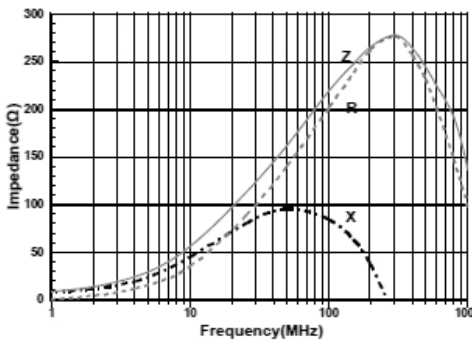


CMBH3216S221QSP

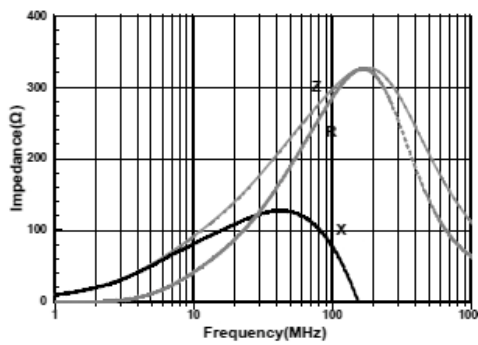


CMBH3216S301QSP

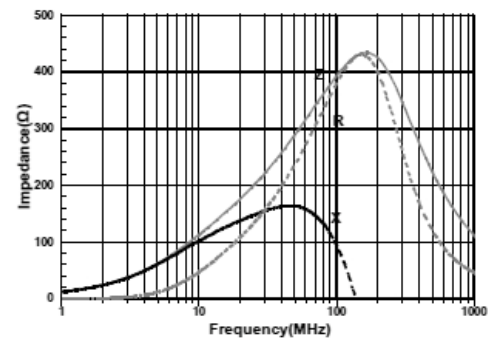


CMBH3216S391QSP

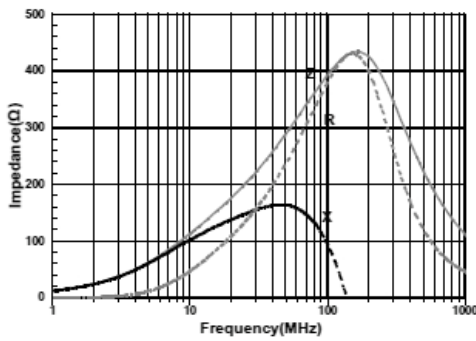

CMBH3216S601NSP

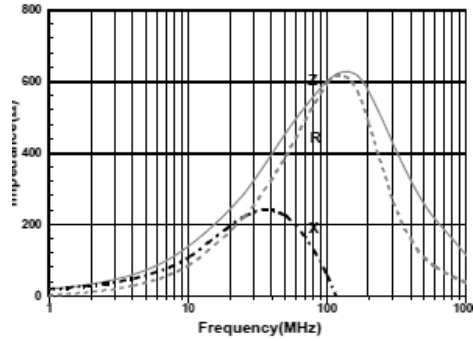

CMBH3216S102LSP

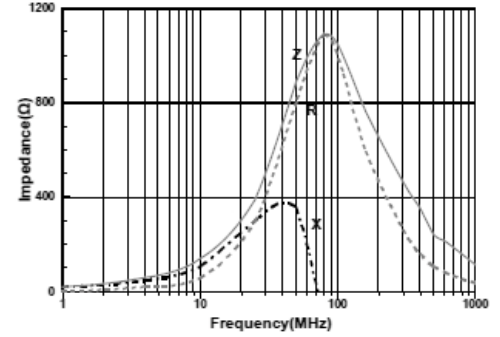

◆ Packaging


Tape Carrier Packaging:

Packaging code: T

- a. Tape carrier packaging are specified in attached figure
- b. Tape carrier packaging quantity please see the following table


Type	3216(1206)
T(mm)	0.9±0.1
Tape	Paper Tape
Quantity	4K

(1) Taping Drawings (Unit: mm)

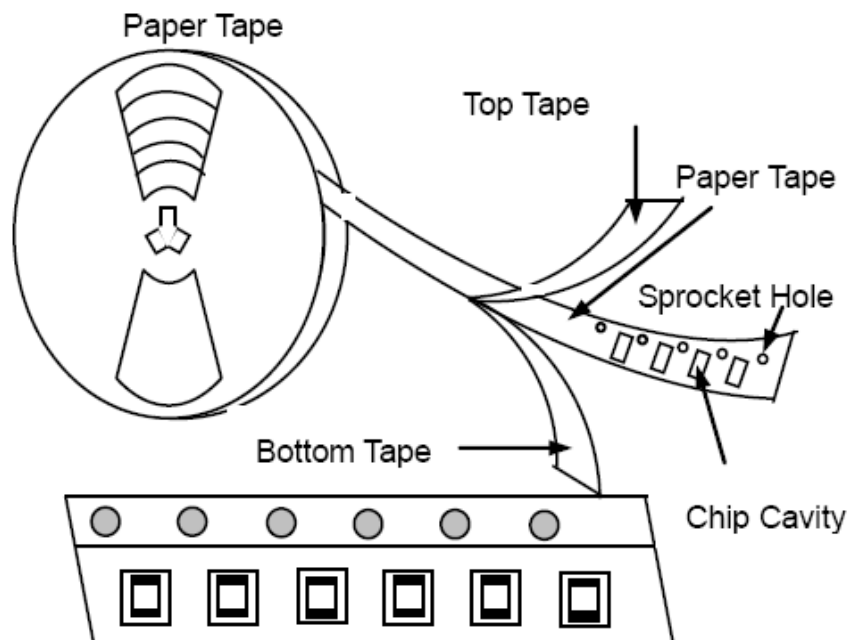

Remark: The sprocket holes are to the right as the tape is pulled toward the user.

(2) Taping Dimensions (Unit: mm)

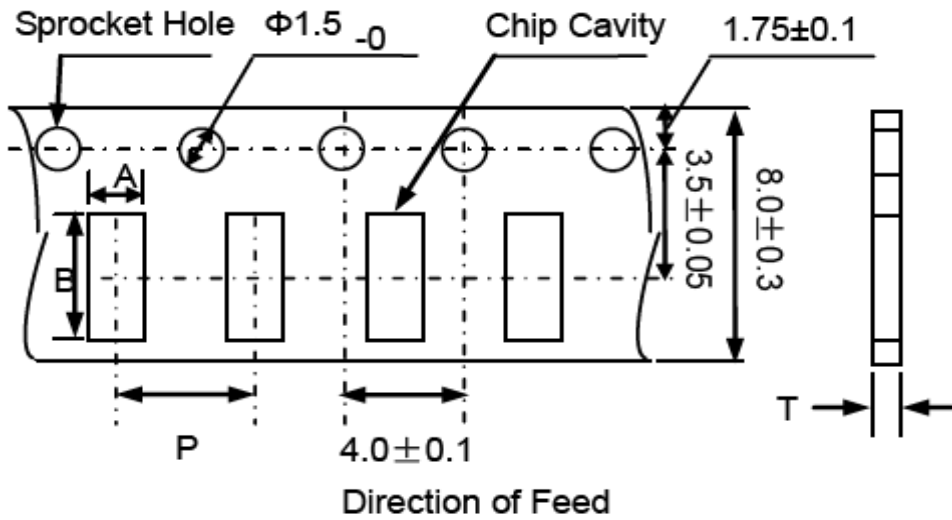

Paper Tape

Type	A	B	P	T max
3216(1206)	1.9 ± 0.2	3.5 ± 0.2	4.0 ± 0.2	0.8

3) Reel Dimensions (Unit: mm)

